



PURE IRON BLOCK ANODES



50 YEARS EXPERIENCE IN CATHODIC PROTECTION



JENNINGS ANODES

PURE IRON BLOCK ANODES

DATA SHEET

The pure iron anode is especially useful in stress corrosion of copper alloys. Therefore, it is mostly applied to the corrosion protection of copper alloy tube of heat exchanger, condenser, pumps, fresh water facility, desalination plant (evaporator, brine heater) and cooling systems of power plants. The soft iron block anode is installed bare in the direct contact to the surface of protected structure.

CHEMICAL COMPOSITION


Element	Content
Manganese (Mn)	0.2% max.
Copper (Cu)	0.2% max.
Aluminum (Al)	0.1% max.
Cadmium (Cd)	0.1% max.
Silicon (Si)	0.01% max.
Nickel (Ni)	0.001% max.
Phosphorus (P)	0.01% max.
Sulphur (S)	0.007% max.
Carbon (C)	0.004% max.
Iron (Fe)	Remainder

ELECTROCHEMICAL PROPERTIES

Technical Measurement	Performance
Current Capacity	80 A.h/kg
Current Density	200 mA/m ²


SPECIFICATIONS

■ Square Type Anode

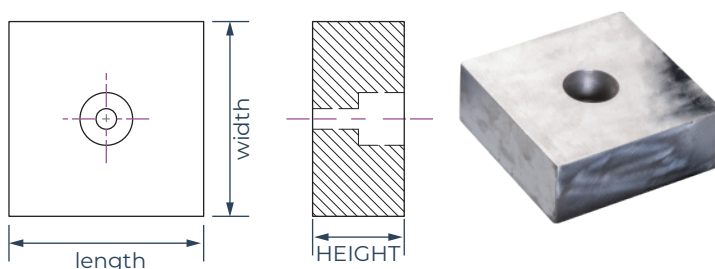

Item No.	Weight	Length / Width	Height
JA-FE-S44	4.4 lbs (2.0 kg)	3.9" (100 mm)	1.2" (30 mm)
JA-FE-S110	11.0 lbs (5.0 kg)	5.9" (150 mm)	1.2" (30 mm)
JA-FE-S209	20.9 lbs (9.5 kg)	6.3" (160 mm)	2.0" (50 mm)
JA-FE-S309	30.9 lbs (14.0 kg)	7.9" (200 mm)	2.0" (50 mm)

■ Round Type Anode

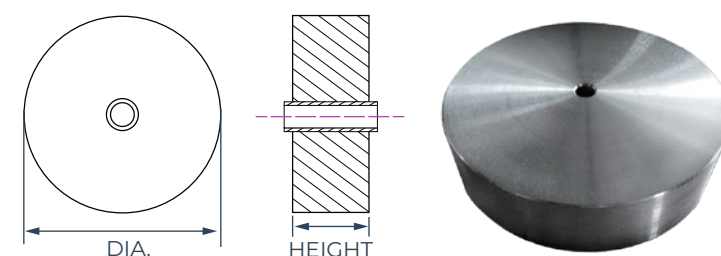

Item No.	Weight	Diameter	Height
JA-FE-R55	5.5 lbs (2.5 kg)	3.9" (100 mm)	2.0" (50 mm)
JA-FE-R88	8.8 lbs (4.0 kg)	5.9" (150 mm)	1.2" (30 mm)

Notes: All dimensions and weights are nominal. The parameter provided is subject to variation in material compositions and Jennings Anodes foundry tolerance.



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

2417 Katy Fort Bend Road,
Katy, Texas 77493
United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland
SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex
Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn