



AC MITIGATION RIBBON (MADE IN USA)



CELEBRATED ENTERPRISE IN CATHODIC PROTECTION

J
JENNINGS ANODES

AC MITIGATION RIBBON

DATA SHEET



Pipeline corrosion, caused by induced AC current, is attributed to high voltage AC power lines in close proximity to a pipeline system. The corrosion can be extremely aggressive, far exceeding the normal corrosion rate caused by corrosive soils. One of the most popular mitigation solutions is a linear grounding system that is installed in parallel to the pipeline.


Compared with bare copper and zinc ribbon, this long-line "cable" is a superior grounding material that provides an effective electrical path to remove or discharge AC current from the pipeline to the ground. It is comprised of a bare stranded copper conductor encased in low resistance backfill with corrosion inhibitors, and then wrapped in a synthetic sock.



■ Low Resistivity Grounding Backfill

Utilizing branded backfill, our AC mitigation ribbon has superior performance. The bulk density and high fixed carbon content coupled with the assured low resistivity medium allows for longer groundbed life at a lower operating cost.

- Fixed Carbon Content: 99.35%
- Ash: 0.6%
- Moisture: 0.05%
- Volatiles: Nil(950°C)
- Bulk Density: 74 lbs. / ft³

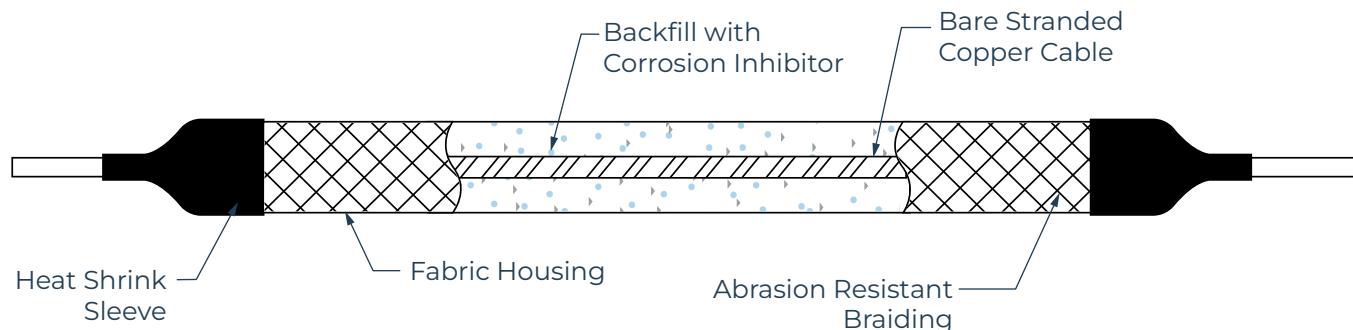

AC MITIGATION RIBBON

DATA SHEET

■ Braid Fabric Jacket

The fabric housing is braided using a high tensile strength heavy duty compact braid assuring product integrity.

Technical Measurement	Performance
Weight	80 g/m ²
Bursting Strength	500N Min. per ISO 3303
Abrasion Resistance	100 Cycles to Failure per ASTM D-4157
Fluid Resistance	PASS, 6-month Immersion Test
Chlorine Resistance	PASS, 6-month Immersion Test
UV Resistance	55% Tear Strength Loss per ASTM G-53: 8 hrs @60°C (140°F) 4 hrs condensation @50 °C (122°F)



APPLICATIONS

This AC mitigation ribbon can be installed in several ways, including horizontal directional drilling, cable plow and trenching. It is a tough product that can be buried directly in all kind of soil, especially well suited the environment where the resistivity is high or various, and where there are risks for interference with secondary structures.

Our AC mitigation ribbon is commonly applied to pipeline grounding systems or structure that are subject to AC interference.

- Prevent voltage spikes during fault conditions
- Reduce AC-induced corrosion
- Maintain AC step and touch potentials to protect personnel from shock hazards



SPECIFICATION

Item No.	Cable Conductor	Sock Diameter	Length	Weight	Design Life
JA-CU-AWG1	#1/0 AWG (1 or 19 strands)	Φ1.5" (Φ38 mm)	500/1000/1500 ft. (152/305/457 m)	1.3 lbs/ft. (1.8 kg/m)	25 yrs.
JA-CU-AWG2	#2 AWG (1 or 19 strands)	Φ1.5" (Φ38 mm)	500/1000/1500 ft. (152/305/457 m)	1.1 lbs/ft. (1.6 kg/m)	25 yrs.
JA-CU-AWG6	#6 AWG (1 or 19 strands)	Φ1.5" (Φ38 mm)	500/1000/1500 ft. (152/305/457 m)	1.0 lbs/ft. (1.5 kg/m)	25 yrs.

Notes: All dimensions and weights are nominal. The parameter provided is subject to variation in material compositions and Jennings Anodes foundry tolerance.

AC MITIGATION RIBBON

DATA SHEET



PACKAGING INFORMATION

Our AC mitigation anode is normally packed on lightweight wooden reel to ensure easy transportation and handling in the field. Steel reel can be supplied as required.

Item No.	Reel Length	Reel Dimensions (Dia. x D)	Weight		Reel Qty	
			N.W.	G.W.	20ft. container	40ft. container
JA-CU-AWG1	1000 ft. (305 m)	Φ42" x 40" (Φ1067 x 1016 mm)	1300 lbs (589 kg)	1505 lbs (683 kg)	24	48
JA-CU-AWG2	1000 ft. (305 m)	Φ42" x 40" (Φ1067 x 1016 mm)	1100 lbs (499 kg)	1390 lbs (630 kg)	24	48
JA-CU-AWG6	1000 ft. (305 m)	Φ42" x 40" (Φ1067 x 1016 mm)	1000 lbs (454 kg)	1260 lbs (708 kg)	24	48

Remarks: Our standard reel length is 1000 ft(305m). Custom reel length is available upon request.



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

3115 Fry Road Ste 303, Katy, Texas 77449, United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn